

1 Attach Header Clips

- A. Locate clips in hardware kit
- B. Place upper tabs of clip around vertical wire and lower over pair of horizontal wires
- C. Snap bottom of clip over vertical wire
 - ” Ensure that clips are securely installed
 - ” Clips should be evenly spaced along outside of rear mesh (2 clips on a 2' unit, 3 clips on a 3' unit, 4 clips on a 4' unit)


2 Connect Power Cords


- A. If necessary connect consecutive header power cords before setting next unit in place
 - ” A maximum of 5 flex frame units may be interconnected together

3 Alternate Power Cord Access

- ” If the back side of the unit can not be accessed for power cord connection, then remove the header cage screws from the front of the unit, and carefully move the header cage to allow access. Reinstall the header cage and screws when done.

Standard Height Unit Installation - 1

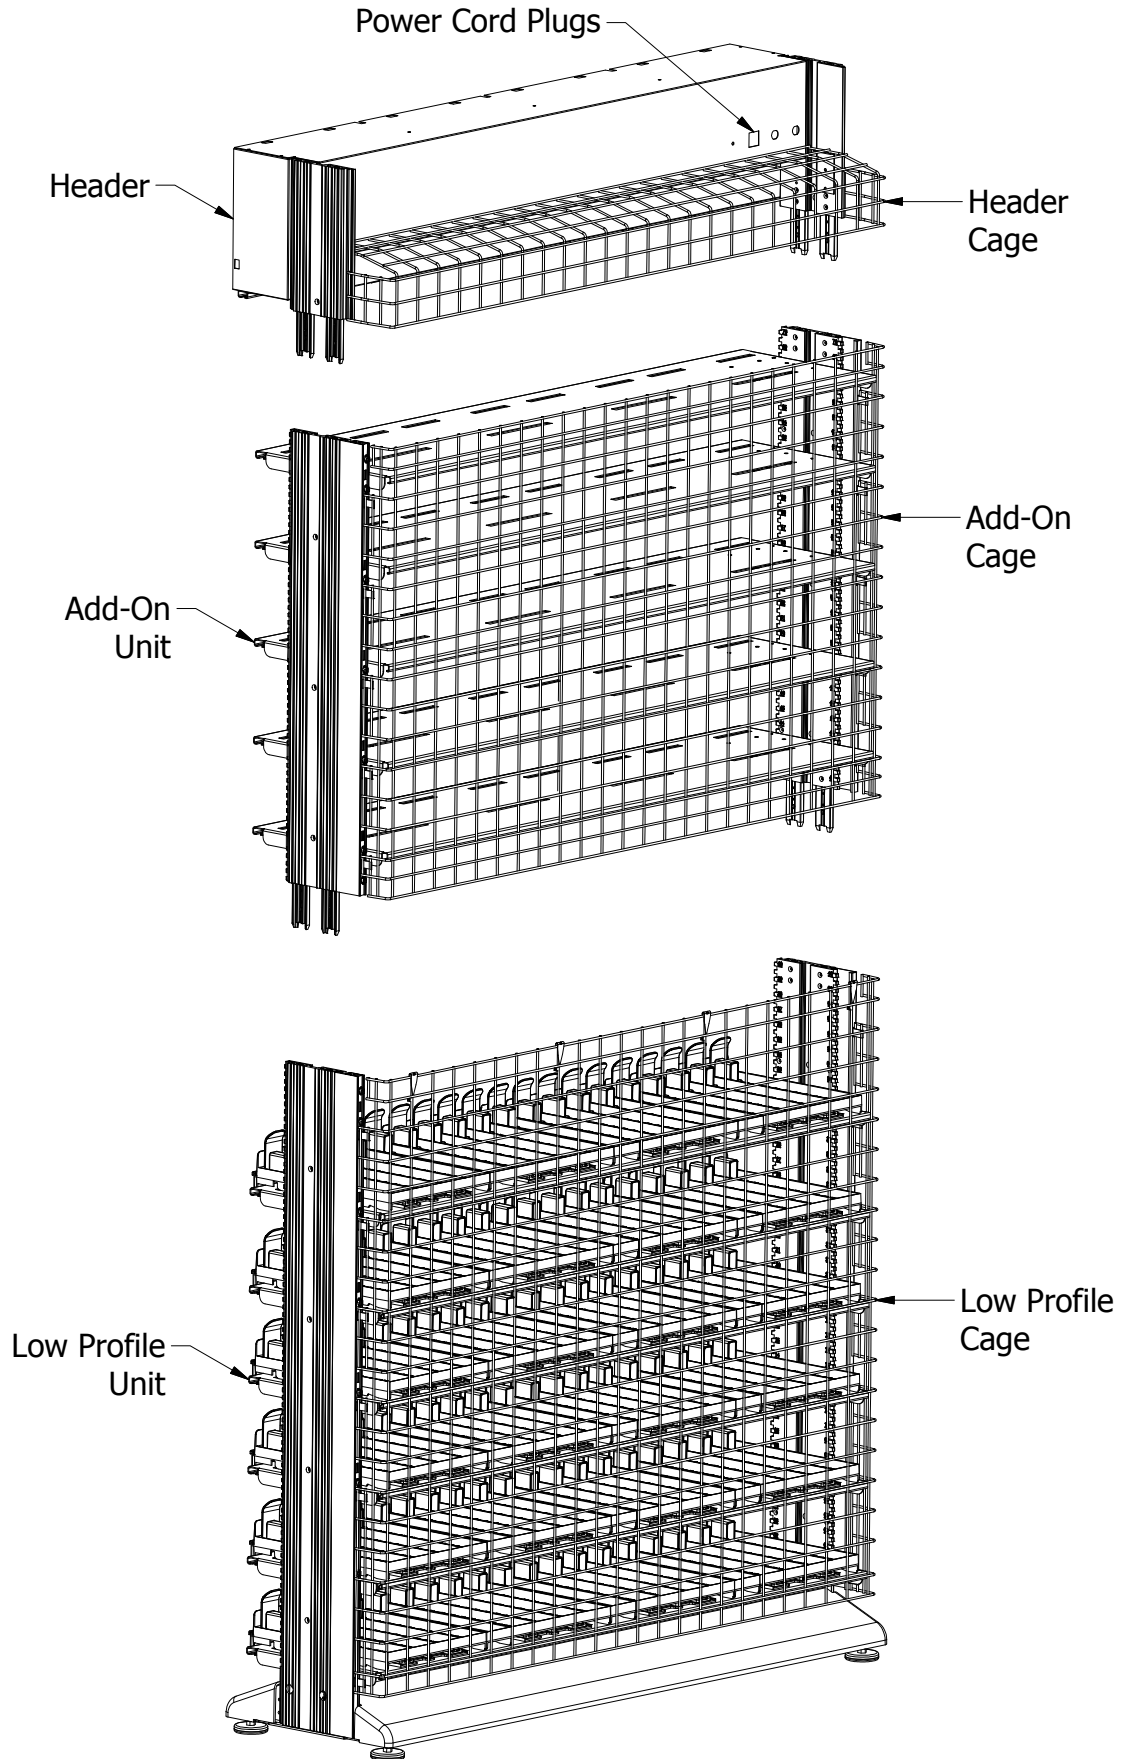

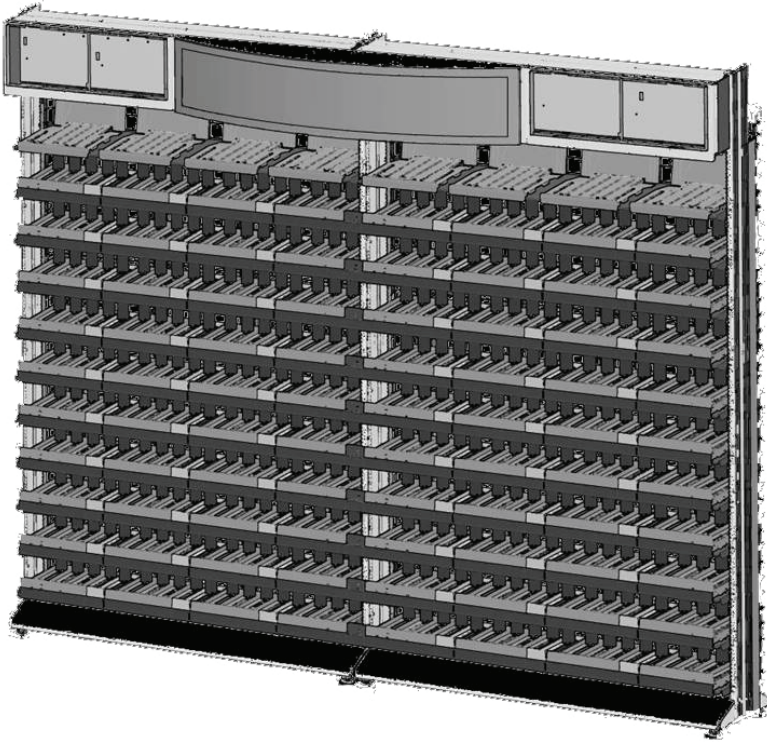

Index

| | |
|-----------------------------------|-------|
| Cover Sheet | 1 |
| Installing Low Profile Units | 2 |
| Installing Standard Height Units | 3-7 |
| Leveling and Joining Units | 8 |
| Mandatory - Securing Units | 9 |
| Installing Header Bezels | 10 |
| Enhanced Header Graphics | 11 |
| Assembling 5-Wide Modules | 12 |
| Installing and Loading Modules | 13 |
| Removing Shelves | 14-15 |
| Installing Shelves | 16-17 |
| Pole Glorifiers & Cosmetic Covers | 18 |

| POS # | DESCRIPTION |
|--------------|---|
| 4J080 | 2' FXF LP TOBACCO FIXTURE |
| 4J081 | 3' FXF LP TOBACCO FIXTURE |
| 4J082 | 4' FXF LP TOBACCO FIXTURE |
| 4J083 | 2' FXF 30" ADD-ON TOBACCO FIXTURE |
| 4J084 | 3' FXF 30" ADD-ON TOBACCO FIXTURE |
| 4J085 | 4' FXF 30" ADD-ON TOBACCO FIXTURE |
| 94574 | 1' ENH HEADER COVER FLEX FRAME |
| 94421 | 2' ENH HEADER COVER FLEX FRAME |
| 94422 | 3' ENH HEADER COVER FLEX FRAME |
| 94423 | 4' ENH HEADER COVER FLEX FRAME |
| 4M677 | 1W FLEX FRAME 2 PACK FILLER (BOXED PER 5) |
| 96185 | 1' FXF BE CARTON VISIBILITY STRIP |

Tools Required:

- 1/4" Socket and Ratchet
- 1/8" Allen Wrench
- Drill/Driver
- #2 Phillips Bit
- #2 Square Drive Bit
- Phillips Screwdriver
- Standard Screwdriver